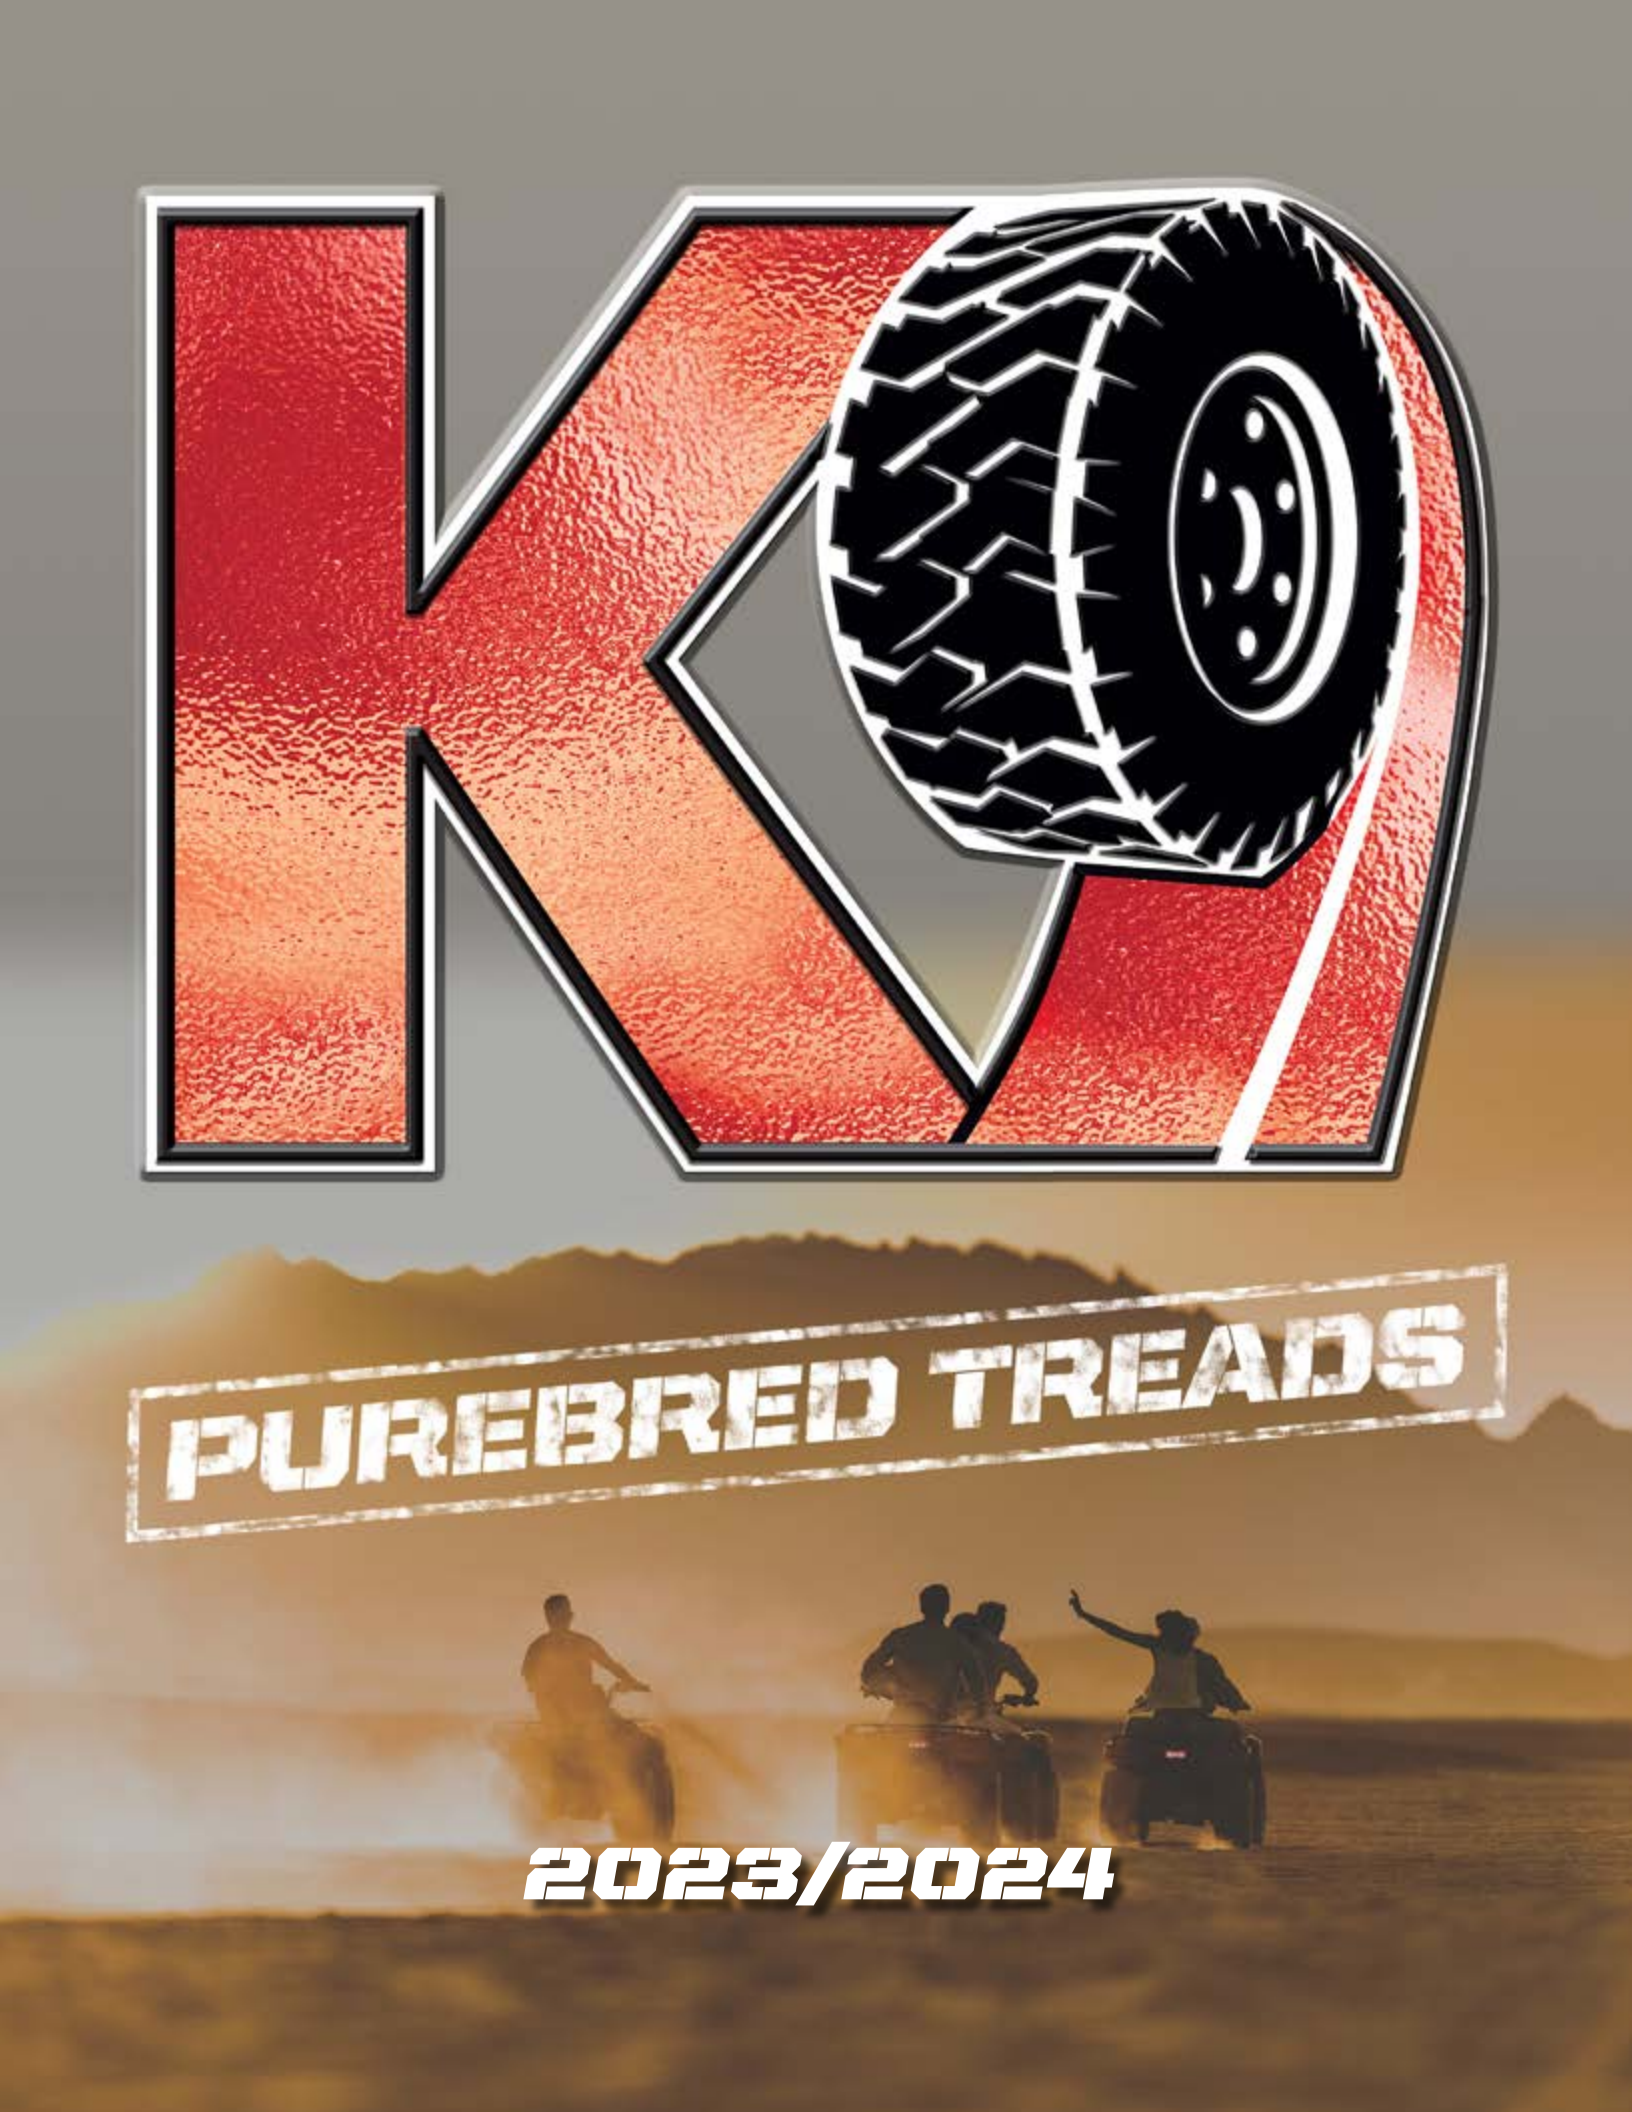
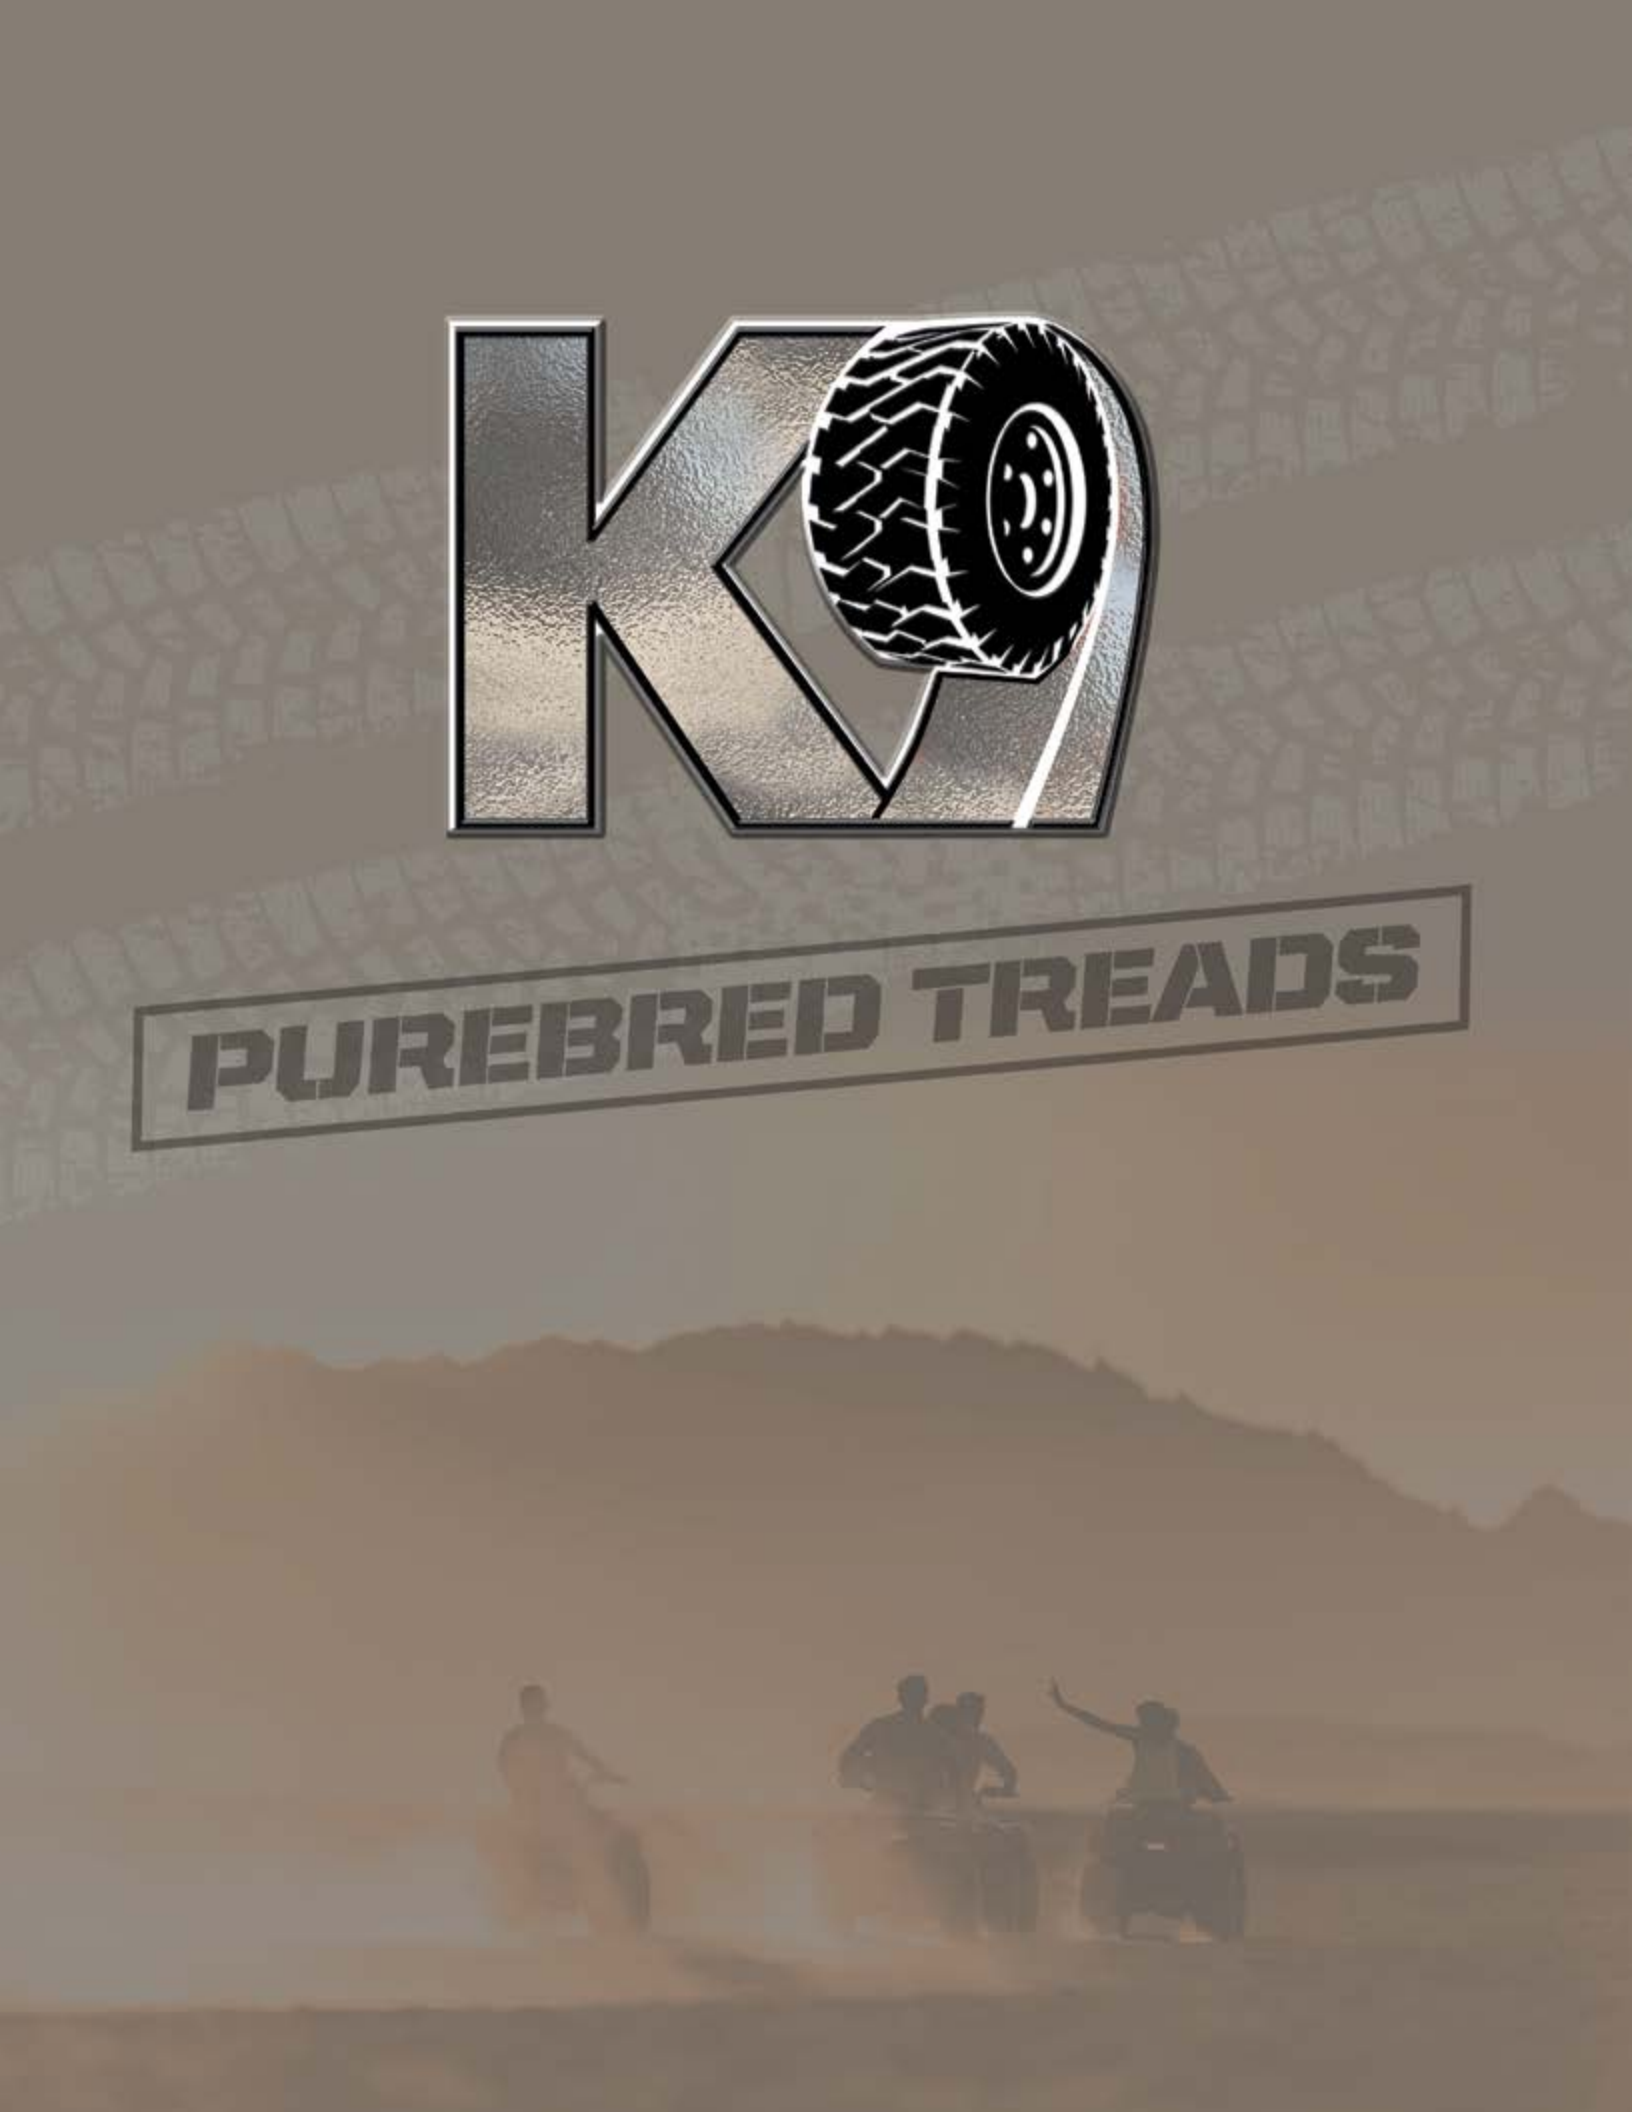

PUREBRED TREADS
2023/2024


PUREBRED TREADS

CONTENTS

Treads by Size guide 2
Farm Tires Cover Page 7
Warranty 8
Radial Farm 9
Bias Rear Farm 10
Bias Front Farm 12
Implement 14
Power Tires Cover Page 16
Skid Steer 18
Construction 21
Forklift 23
ATV Cover Page 24
Standard ATV 26
Heeler ATV 26
Lawn and Garden Cover Page 30
Turf 31
PlusTurf 32
Power 32
Rib 33
Stud 33
Sawtooth 33
Golf 33
Trailer Tires Cover Page 34
Bias Trailer 35
Radial Trailer 35

TREAD GUIDE

R1



7-16
8-16
9.5-16
9.5-22
8.3-24
9.5-24
11.2-24
12.4-24
13.6-24
18.4-26
11.2-28
9.5-32
20.8-34
18.4-38

R1 Heavy Duty



8.00-18
9.5-24
14.9-24
12.4-28
13.6-28
14.9-28
16.9-28
16.9-30
18.4-30

F2



4.00-12
4.00-15
5.00-15
7.5L-15
9.5L-15
11L-15
5.50-16
6.00-16
6.50-16
7.50-16
10.00-16
11.00-16
4.00-19
7.50-20

F2M



9.5L-15
11L-15
10.00-16
11.00-16
14L-16.1
16.5L-16.1

I1



9.5L-14
11L-14
5.90L-15
6.70L-15
7.60L-15
9.5L-15
11L-15
12.5L-15
11L-16
14L-16.1
16.5L-16.1
21.5L-16.1
11.25-28

SK



10-16.5
12-16.5
14-17.5
15-19.5

TREAD GUIDE

SK ND



12-16.5
10-16.5

Solid SK



30X10-16 (10-16.5)
33X12-20 (12-16.5)
1300-24
1400-24

F3



11L-15
11L-16

R4



12.5/80-18
16.9-24
17.5L-24
18.4L-24
19.5L-24

G2



13.00-24
14.00-24
17.5-25

Industrial Lug



5.00-8
6.00-9
6.50-10
7.00-12
28X9-15 (8.15-15)
7.50-15
8.25-15

TREAD GUIDE

ATV Standard



25X12-10
24X8-12
25X8-12
25X10-12
26X9-12
26X11-12

ATV Heeler



25X8-12
25X10-12
26X9-12
26X11-12
26X9-14
26X11-14
27X9-14
27X11-14

Kingsville



24X11-10
25X12-10
24X9-11
24X10-11
24X8-12
25X8-12
25X10-12

Del Rio



25X8R12
25X10R12
26X9R12
26X11R12
27X9R14
27X11R14

Texline



28X10R14
30X10R14
28X10R15
30X10R15

Turf



4.10/3.50-4
11X4.00-5
13X5.00-6
13X6.50-6
15X6.00-6
16X6.50-8
18X8.50-8
18X9.50-8
20X8.00-8
20X10.00-8

TREAD GUIDE

Plus Turf



20X10.00-10
23X8.50-12
23X10.50-12
24X12.00-12
26X12.00-12

R1 LG



13X5.00-6
15X6.00-6
16X6.50-8
18X9.50-8
20X10.00-8
23X10.50-12
24X12.00-12
26X12.00-12
31X15.50-15

Rib



11X4.00-5
13X5.00-6
13X6.50-6
15X6.00-6
16X6.50-8
18X8.50-8

Stud



4.10/3.50-4
4.10/3.50-6
4.80-8

Sawtooth



4.10/3.50-4
4.10/3.50-5
4.10/3.50-6

Bias Round



18X8.50-8
18.5X8.50-8
20.5X8.0-10

TREAD GUIDE

Bias Square



4.80-8
5.70-8
4.80-12
5.30-12
8-14.5

Radial ST




ST175/80R13
ST205/75R14
ST215/75R14
ST205/75R15
ST225/75R15
ST235/80R16
ST235/85R16

All Steel Radial



ST235/80R16 ALL STEEL
ST235/85R16 ALL STEEL

Smooth K9

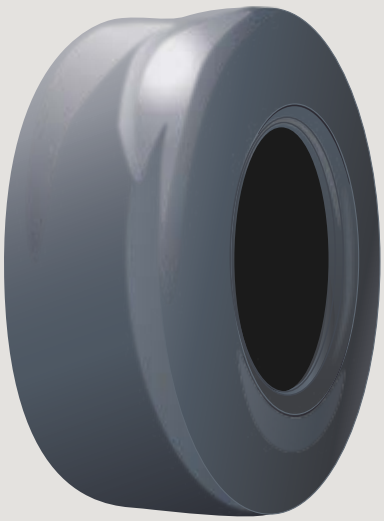

9X3.50-4
11X4.00-
511X6.00-5
13X5.00-6
13X6.50-6

K91



10-16.5
12-16.5
14-17.5
15-19.5

K97



12-16.6

TREAD GUIDE

K9 Industrial Pneumatics_201



5.00-8
6.00-9
6.50-10
8.55-15
7.00-12
28X9-15

K9 Industrial Pneumatics_202



10.00-20
12.00-20

CL3 Rear



20X10-9
20X11-9
21X7-10
22x7-10
22X10-10
22X11-9
23X7-10

K9 808



13.00-24
14.00-24

K9 6



10-16.5
12016.5

K9 3



10-16.5
12016.5

Tedder K9-156006-HT



15X6.00-6

K9 Skid Steer TO



13.00-24

TUBE & SOLID TIRE LIMITED

DOBERMANN & K9 BRAND WARRANTY

PRODUCT COVERAGE

5 Year Warranty:
Radial and Bias Farm Tires
Construction Tires
Industrial Tires
Solid Tires
Lawn/Garden Tires
ATV Tires
Bias Trailer Tires
Inner Tubes

Lifetime Warranty:
Radial Trailer Tires
All Steel Trailer Tires

WARRANTY COVERAGE

Tube and Solid tire warranties all inner tubes and tires sold for 100% of their value or replacement.

Radial and Bias Farm Tires are warrantied for 100% of the tire value for the first year after purchase and prorated according to tread depth in years 2-5. This warranty includes Field Hazard Coverage for stubble damage and other similar field hazards. Field Hazard damage consists of cuts, snags, punctures, fabric breaks, tread tears, and shoulder damage caused by contact with elements normally found in agricultural fields.

Construction and Industrial Tires are warrantied for 100% of the tire value for the first year after purchase and prorated according to tread depth in years 2-5.

Solid Forklift and Solid Construction Tires are warrantied for 100% of the tire value for the first year after purchase and prorated according to tread depth in years 2-5.

ATV Tires and Bias Trailer Tires are warrantied for 100% of the tire value for 5 years.

Inner Tubes are warrantied for 100% of the tube value plus labor (up to $3.00 per inch of rim width, i.e. an 18.4-38 tube equals 38 rim inches x $3 = $114 for service) and $1.00 per gallon of replacement fluid.

Radial Trailer Tires and All Steel Trailer Tires are warranted for 100% of the tire value for the life of the tire, with a free tire replacement in the event of failure caused by normal use or road hazard. To qualify for this warranty, tires cannot be unmounted and remounted, tires cannot be transferred to a different vehicle, tires cannot be transferred to a new owner, tire must have useable tread (2/32nds or more), and proof of purchase must be provided at the time of warranty.

This warranty expressly excludes punitive damages, inconvenience, loss of time, lost profits, or any other incidental damages. This warranty extends to all Dobermann and K9 brand products.
Claims can be submitted by phone, email, or fax. Product does not have to be returned and credits are issued immediately.

Thank you for your patronage,
Tube and Solid Tire, LTD

K9



K9 FARM TIRES

FARM TIRES

BIAS REAR FARM



Deep and wide lug pattern gives excellent load carrying capacity and traction.



PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-716-R1	7-16	6	TT	767	30.2	183	7.2	1100	45
K9-816-R1	8-16	6	TT	813	32.0	203	8.0	1390	45
K9-9516-R1	9.5-16	6	TT	846	33.3	239	9.4	1390	45
K9-9522-R1	9.5-22	8	TT	1000	39.41	241	9.5	2425	34
K9-8324-R1	8.3-24	8	TL	993	39.1	211	8.3	2030	45
K9-9524-R1	9.5-24	8	TL	1049	41.3	239	9.4	2440	41
K9-11224-R1	11.2-24	8	TL	1105	43.5	284	11.2	2750	35
K9-12424-R1	12.4-24	8	TL	1168	46.0	315	12.4	2830	33
K9-13624-R1	13.6-24	8	TL	1209	47.6	345	13.6	3300	30
K9-14924-R1	14.9-24	8	TL	1265	49.8	378	14.9	3960	26
K9-18426-R1	18.4-26	12	TL	1463	57.6	467	18.4	6615	33
K9-11228-R1	11.2-28	8	TL	1204	47.4	284	11.2	2910	35
K9-12428-R1	12.4-28	8	TL	1265	49.8	315	12.4	3410	35
K9-13628-R1	13.6-28	8	TL	1318	51.9	345	13.6	3630	32
K9-14928-R1	14.9-28	8	TL	1364	53.7	378	14.9	4180	26
K9-16928-R1	16.9-28	8	TL	1435	56.5	429	16.9	4800	25
K9-16930-R1	16.9-30	8	TL	1486	58.5	429	16.9	5070	25
K9-18430-R1	18.4-30	10	TT	1560	61.4	467	18.4	6390	28
K9-9532-R1	9.5-32	8	TL	1242	48.9	229	9.0	2700	34
K9-18434-R1	18.4-34	10	TL	1659	65.3	467	18.4	5840	26
K9-20834-R1	20.8-34	12	TL	1760	69.3	528	20.8	6040	24
K9-15538-R1	15.5-38	10	TL	1595	62.8	394	15.5	4740	26
K9-18438-R1	18.4-38	10	TL	1768	69.6	467	18.4	6000	26
K9-20838-R1	20.8-38	14	TL	1834	72.2	531	20.9	8540	32 4
K9-12424-R2	12.4-24	12	TT	1192	46.93	315	12.40		
K9-14924-R2	14.9-24	12	TT	1305	51.38	378	17.89		
K9-18430-R2	18.4-30	12	TT	1550	61.02	467	18.39		
K9-716-R1Q	7-16	6	TT	767		183	7.20	1100.00	5.00
K9-75016-R1Q	7.50-16	8	TT						
K9-816-R1Q		6	TT	813		203	8.00	1390.00	45.00

FARM TIRES

R2



Deeper, wider, and larger lugs plus heavy ply ratings equal high carrying capacity and super tough, puncture resistant sidewall.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-12424-R2	12.4-24	12	TT	1192	46.93	315.00	12.40	2832.94	32.00
K9-14924-R2	14.9-24	12	TT	1305	51.38	378.00	17.89	3527.40	26.00
K9-18430-R2	18.4-30	12	TT	1550	61.02	467.00	18.39	5511.56	26.00
K9-18434-R2	18.4-34	12	TT	1655	65.16	467.00	18.39	6007.60	26.00
K9-23126-R2	23.1-26	16	TT	1605	63.19	587.00	23.11	7165.02	25.00
	23.1-30	16	TT	1829	72.01	510.00	24.02	8818.00	33.00

HEAVY DUTY



Deeper, wider, and larger lugs plus heavy ply ratings equal high carrying capacity and super tough, puncture resistant sidewall.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-80018-R1HD	8.00-18	12	TL	840	33.1	195	7.7	1440	25
K9-9524-R1HD	9.5-24	12	TL	1050	41.3	240	9.4	2860	41
K9-14924-R1HD	14.9-24	16	TL	1270	50.0	391	15.4	5290	35
K9-12428-R1HD	12.4-28	14	TL	1270	50.0	315	12.4	4670	51
K9-13628-R1HD	13.6-28	14	TL	1320	52.0	345	13.6	4710	49
K9-14928-R1HD	14.9-28	14	TL	1365	53.7	388	15.3	5070	44
K9-16928-R1HD	16.9-28	14	TL	1435	56.5	429	16.9	6000	35
K9-16930-R1HD	16.9-30	14	TL	1485	58.5	429	16.9	6010	32
K9-18430-R1HD	18.4-30	14	TL	1560	61.4	470	18.5	7600	38

FARM TIRES

BIAS FRONT FARM



Front tire pattern with low void ratio enhances grip performance and puncture resistance.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-50012-R1	5.00-12	6	TT	579	22.8	145	5.7	990	51
K9-60012-R1	6.00-12	6	TL	584	23.0	152	6.0	882	36
K9-614-R1	6-14	6	TT	627	24.7	155	6.1	850	42
K9-60016-R1	6.00-16	8	TT	744	29.3	165	6.5	1760	58
K9-75016-R1	7.50-16	8	TT	808	31.8	203	8.0	2200	51
K9-75020-R1	7.50-20	8	TT	919	36.2	203	8.0	2380	48

BIAS FRONT FARM



Flat tread profile and deep rib provides for better lateral stability and longer life.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-40012-F2	4.00-12	4	TL	528	20.8	112	4.4	660	52
K9-40015-F2	4.00-15	4	TL	615	24.2	114	4.5	715	50
K9-50015-F2	5.00-15	6	TL	653	25.7	140	5.5	803	55
K9-75L15-F2	7.5L-15	6	TL	765	30.1	208	8.2	1430	44
K9-95L15-F2	9.5L-15	8	TL	767	30.2	249	9.8	1870	44
K9-11L15-F2	11L-15	8	TL	790	31.1	267	10.5	2090	44
K9-55016-F2	5.50-16	8	TL	709	27.9	150	5.9	1430	58
K9-60016-F2	6.00-16	6	TL	744	29.3	165	6.5	1470	62
K9-65016-F2	6.50-16	6	TL	759	29.9	173	6.8	2030	55
K9-75016-F2	7.50-16	8	TL	808	31.8	203	8.0	2460	54
K9-100016-F2	10.00-16	8	TL	899	35.4	274	10.8	2670	41
K9-110016-F2	11.00-16	10	TL	968	38.1	320	12.6	3300	51
K9-40019-F2	4.00-19	6	TL	965	38.0	112	4.4	780	49
K9-75020-F2	7.50-20	8	TL	919	36.2	203	8.0	2270	49

FARM TIRES

BIAS FRONT FARM



Flat four rib profile is perfect for field work on two wheel drive tractors in soil applications.



PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-95L15-F2M	9.5L-15	8	TL	765	30.1	240	9.4	1870	44
K9-11L15-F2M	11L-15	8	TL	810	31.9	270	10.6	2090	44
K9-100016-F2M	10.00-16	8	TL	900	35.4	275	10.8	2990	49
K9-110016-F2M	11.00-16	10	TL	970	38.2	320	12.6	3300	51
K9-14L161-F2M	14L-16.1	10	TL	980	38.6	350	13.8	3520	46
K9-165L161-F2M	16.5L-16.1	12	TL	1024	40.3	414	16.3	5670	42
K9-60012-R1Q	6.00-12	6	TT	1135	25.0	152	5.9	1322	36
K9-100016-622	10.00-16	10	TT	910	35.8	275	10.8	2469	52
K9-110016-622	11.00-16	12	TT	970	38.1	315	12.4	3417	60

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-40012-621	4.00-12	4PR	TL	535.00	21.06	110.00	4.33	551.00	49.00
K9-50015-621	5.00-15	4PR	TL	665.00	26.18	140.00	5.51	717.00	44.00
K9-95L15-621	9.5L-15	8PR	TL	780.00	30.71	240.00	9.45	1874.00	48.00
K9-55016-621	5.50-16	8PR	TL	710.00	27.95	150.00	5.91	1168.00	54.00
K9-60016-621	6.00-16	8PR	TL	740.00	29.13	160.00	6.30	1488.00	65.00
K9-65016-621	6.50-16	8PR	TL	750.00	29.53	175.00	6.89	1620.00	61.00
K9-75016-621	7.50-16	8PR	TL	810.00	31.89	205.00	8.07	1708.00	57.00
K9-100016-621	10.00-16	10PR	TL	910.00	35.83	275.00	10.83	2469.00	52.00
K9-110016-622	11.00-16	12PR	TL	970.00	38.19	315.00	12.40	705.00	48.00
K9-40019-621	4.00-19	4PR	TL	720.00	28.35	110.00	4.33	717.00	52.00
K9-75020-621	7.50-20	8 PR	TL	910.00	35.83	205.00	8.07	2249.00	54.00
K9-50012-R1Q	5.00-12	6PR	TL	590.00	23.22	112.00	4.41	517.00	29.00
K9-60012-R1Q	6.00-12	6PR	TL	635.00	25.00	152.00	5.98	893.00	36.00
K9-100016-622	10.00-16	10PR	TL	910.00	35.83	275.00	10.83	2469.00	52.00

IMPLEMENT



Flat profile provides less soil compaction while the shoulder minimizes field damage.



PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-95L14-I1	9.5L-14	8	TL	734	28.9	239	9.4	2400	44
K9-11L14-I1	11L-14	8	TL	747	29.4	274	10.8	2460	36
K9-590L15-I1	5.90L-15	4	TL	658	25.9	152	6.0	1280	44
K9-670L15-I1	6.70L-15	10	TL	704	27.7	168	6.6	1600	44
K9-760L15-I1	7.60L-15	6	TL	719	28.3	191	7.5	2090	49
K9-95L15-I1	9.5L-15	8	TL	767	30.2	249	9.8	2460	44
K9-11L15-I1	11L-15	12	TL	790	31.1	267	10.5	3190	52
K9-125L15-I1	12.5L-15	12	TL	838	33.0	325	12.8	3850	52
K9-31135015-I1	31X13.50-15	10	TL	762	30.0	330	13.0	4050	46
K9-11L16-I1	11L-16	10	TL	795	31.3	203	8.0	2880	44
K9-14L161-I1	14L-16.1	12	TL	838	33.0	356	14.0	4670	44
K9-165L161-I1	16.5L-16.1	12	TL	1024	40.3	414	16.3	5670	41
K9-215L161-I1	21.5L-	14	TL	1102	43.4	553	21.8	7850	36
K9-156006-HT	16.1 15X6.00-6	10	TL	385.00	15.16	160.00	6.30	2238.00	75.00
K9-95L14-641	9.5L-14	8	TL	741.00	29.17	241.00	9.49	2403.00	44.00
K9-11L14-641	11L-14	8	TL	750.00	29.53	280.00	11.02	2469.00	36.00
K9-95L15-641	9.5L-15	8	TL	780.00	30.71	240.00	9.44	2469.00	44.00
K9-11L15-641	11L-15	12	TL	810.00	31.89	280.00	11.02	3197.00	52.00
K9-125L15-641	12.5L-15	12	TL	823.00	32.40	318.00	12.52	3858.00	52.00
K9-11L16-641	11L-16	12	TL	835.00	32.88	280.00	11.02	3307.00	52.00

FARM TIRES

HIGH SPEED IMPLEMENT



Flat profile provides less soil compaction while the shoulder minimizes field damage.



PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-95L15-F1	9.5L-15	12	TL	765	30.10	245	9.6	7533.00	90.00
K9-95L15-642	9.5L-15	12	TL	741	29.17	241	9.49	3417.00	90.00
K9-11L15-F1	11L-15	12	TL	775	30.50	279	11.0	8747.00	90.00
K9-11L15-642	11L-15	12	TL	810	31.89	280	11.02	3968.00	90.00
K9-125L15-F1	12.5L-15	12	TL	815	32.10	315	12.40	10304.00	90.00
K9-125L15-642	12.5L-15	12	TL	823	32.40	318	12.52	4674.00	90.00

IRRIGATION/PIVOT



Standard irrigation lug for most applications requiring a tough tubeless tire with high UV resistance

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-11224-1R	11.2-24	6	TL	1050	41.3	284	11.2	2330	26
K9-14924-1R	14.9-24	6	TL	1255	49.4	378	14.9	2970	23
K9-11238-IR	11.2-38	6	TL	1465	57.7	284	11.2	2830	26

IRRIGATION/PIVOT

Extra heavy lug irrigation tire for soft or sandy soil applications.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-11224-IR90	11.2-24	6	TL	1105	43.5	284	11.2	2330	26
K9-14924-IR90	14.9-24	6	TL	1255	49.4	378	14.9	2970	23
K9-11238-IR90	11.2-38	6	TL	1465	57.7	284	11.2	2830	26

K9



K9 POWER TIRES

POWER TIRES

SKID STEER



Classic skid steer design with overlapped center lug to provide stability while driving under heavy load conditions works well for all applications.



PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-10165	10-16.5	10	TL	782	30.8	254	10.0	4710	75
K9-12165	12-16.5	12	TL	820	32.3	300	11.8	6090	80
K9-14175	14-17.5	14	TL	919	36.2	348	13.7	8540	80
K9-15195	15-19.5	16	TL	1001	39.4	381	15.0	9190	60

POWER TIRES

SKID STEER



Deep L4 lug pattern provides optimal tread life and non-directional tread face provides better grip on smooth surfaces.



PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-10165-D	10-16.5	10	TL	795	31.3	268	10.6	4710	75
K9-12165-D	12-16.5	12	TL	932	36.7	348	13.7	6310	80

Large center lug provides better durability and extra deep tread ensures long life.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-10165-LS	10-16.5	12	TL	795	31.3	268	10.6	4710	75
K9-12165-LS	12-16.5	12	TL	932	36.7	348	13.7	6310	80



Puncture proof and flat free solid skid steer design provides maximum life and durability in any application.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-10165-L	30X10-16	NA	NA	767	30.2	234	9.2	4963	NA
K9-10165-R	30X10-16	NA	NA	767	30.2	234	9.2	4963	NA
K9-12165-L	33X12-20	NA	NA	831	32.7	284	11.2	6600	NA
K9-12165-R	33X12-20	NA	NA	831	32.7	284	11.2	6600	NA
K9-130024-L	13.00-24	NA	NA	1279	50.4	324	12.8	13970	NA
K9-130024-R	13.00-24	NA	NA	1279	50.4	324	12.8	13970	NA
K9-140024-L	14.00-24	NA	NA	1330	52.4	350	13.8	20460	NA
K9-140024-R	14.00-24	NA	NA	1330	52.4	350	13.8	20460	NA

POWER TIRES

SKID STEER



Designed to give high stability to machines and is highly favorable on challenging terrains.The high contact rate between the surface and the tread pattern depth, provides superior resistance to wear and puncture. The aggresive tread pattern provides good traction and excellent handling.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-10165-3	10-16.5	12	TL	773	30.4	264	10.4	5,236	90
K9-12165-3	12-16.5	12	TL	831	37.7	307	12.1	6,779	90



Tires suitable for all terrains with longer service life, allotting for reduction in cost per hour. Newly designed tread pattern creates extended wear for high abuse and hard surface applications.
The extra deep tread with wider and sturdier blocks provides best traction, stability, and puncture resistance.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-10165-6	10-16.5	12	TL	585	23.0	264	10.4	5,236	90
K9-12165-6	12-16.5	14	TL	795	31.3	315	12.4	6,779	90

Greater stability and puncture resistance through heavy duty sidewall and deep lugs.Thicker ply ratings for severe construction sites. The traction tread pattern increases road holding.
Sturdy carcass provides high load.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-12165-7	12-16.5	14	TL	835	32.9	307	12.1	6,779	90

POWER TIRES

SKID STEER



Designed to give high stability to machines and is highly favorable on challenging terrains.The high contact rate between the surface and the tread pattern depth, provides superior resistance to wear and puncture.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-188508-R4	18X8.50-8	4PR	TL	450	17.7	213	8.4	825	22
K9-1885010-R4	18X8.50-10	4PR	TL	462	18.2	203	8.0	830	22
K9-2385012-R4	23X8.50-12	4PR	TL	584	23.0	213	8.4	1,100	22

R2



The K9 R4 has self cleaning properties and utilizes a traction design. The sidewall has been reinforced and works in extreme conditions. Excellent for utility tractors and backhoe equipment.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-1258018-603	12.5/80-18	14PR	TL	1,001	39.4	350	13.8	5,787	54
K9-16924-601	16.9-24	12PR	TL	1,236	48.7	429	16.9	7,165	38
K9-195L24-601	19.5L-24	16PR	TL	1,314	51.7	495	19.5	7,606	33
K9-195L24-609	19.5L-24	12PR	TL	1,314	51.7	495	19.5	7,617	33



POWER TIRES

CONSTRUCTION



Widely spaced large lugs provide optimal traction on hard surfaces and good self cleaning in muddy conditions.



PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-1258018-R4	12.5/80-18	14	TL	988	38.9	307	12.1	4670	62
K9-16924-R4	16.9-24	10	TL	1308	51.5	439	17.3	7165	38
K9-175L24-R4	17.5L-24	10	TL	1270	50.0	445	17.5	6945	39
K9-184L24-R4	18.4L-24	12	TL	1318	51.9	467	18.4	7100	32
K9-195L24-R4	19.5L-24	12	TL	1318	51.9	495	19.5	7606	33
K9-10165-1	10-16.5	10	TL	779	30.7	261	10.3	4707	75
K9-12165-1	12-16.5	12	TL	830	32.7	248	9.8	6316	80
K9-14175-1	14-17.5	14	TL	922	36.3	351	13.8	8543	80
K9-15195-1	15-19.5	14	TL	1,029	40.5	391	15.4	10064	70



Angled rib provides good self cleaning and stable steering.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-11L15-F3	11L-15	10	TL	813	32.0	279	11.0	2330	52
K9-11L16-F3	11L-16	10	TL	818	32.2	279	11.0	2750	64
K9-11L16-632	11L-16	12	TL	838	33.0	279	11.0	2756	64

POWER TIRES

CONSTRUCTION



The K9 G2 is an all purpose construction tire that has a sturdy sidewall for lateral stability. It has an open shoulder tread for traction and self cleaning in certain conditions.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-130024-G2	13.00-24	16	TL	1278	50.3	333	13.1	7385	58
K9-140024-G2	14.00-24	16	TL	1348	53.1	362	14.3	8047	54
K9-17525-G2	17.5-25	16	TL	1330	52.4	444	17.5	8030	47



PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-31155015-R1	31X15.50-15	10	TL	810	31.9	405	15.9	3300	60



Designed for various engineering machinery vehicles and has wide running area with deep patterns. Good towing property, wear resistance and cut resistance, with long service life and tight carcass.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-130024-808	13.00-24	16	TL	1,280	50.4	330	13.0	6,779	47
K9-140024-808	14.00-24	16	TL	1,350	53.2	360	14.2	8,047	51

POWER TIRES

FORKLIFT



Industrial deep tread design provides optimal traction on smooth surfaces while reducing heat build up in duty cycle operations. All forklift tires come as a tube, tire, and flap set.



PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-5008	5.00-8	10	TT	467	18.4	132	5.2	2400	145
K9-6009	6.00-9	10	TT	541	21.3	165	6.5	2910	123
K9-65010	6.50-10	10	TT	594	23.4	180	7.1	3300	112
K9-70012	7.00-12	14	TT	691	27.2	201	7.9	4670	131
K9-28915	28X9-15 (8.15-15)	12	TT	719	28.3	216	8.5	6600	128
K9-75015	7.50-15	16	TT	772	30.4	211	8.3	6170	134
K9-82515	8.25-15	16	TT	856	33.7	239	9.4	7820	135

K9



K9 ATV TIRES



K9 HEAVY DUTY RUN FLAT ATV TIRE



- 12 Ply Rated Sidewall
- Run Flat Capability:
  300 miles @ 30 mph @ 0 psi
- Deep, non-directional tread for traction and stability
- Ultra-tough bias ply construction for long lasting, even wear

K9

PUREBRED TREADS

ATV TIRES

ATV



Classic directional tread pattern provides traction in all environments while the widely spaced lugs shed mud and debris.



PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-251210	25X12-10	6	TL	638	25.1	290	11.4	495	7
K9-24812	24X8-12	6	TL	606	23.9	198	7.8	310	7
K9-25812	25X8-12	6	TL	638	25.1	200	7.9	340	7
K9-251012	25X10-12	6	TL	630	24.8	253	10.0	420	7
K9-26912	26X9-12	6	TL	662	26.1	219	8.6	410	7
K9-261112	26X11-12	6	TL	665	26.2	280	11.0	460 4	7
K9-241110	24X11-10	6	TL	630	24.8	282	11.1	40	7
K9-24911	24X9-11	6	TL	605	23.8	218	8.6	365	7
K9-241011	24X10-11	6	TL	615	24.2	257	10.1	395	7

ATV HEELER & RUNFLAT

Non-directional tread pattern provides top notch handling and superior traction while giving a smoother ride. Available in standard or in the ultra-tough 12 ply-rated Run Flat version.



PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-25812-HHD	25X8-12 RUN FLAT	12	TL	635	25.0	203	8.0	900	28
K9-251012-HHD	25X10-12 RUN FLAT	12	TL	635	25.0	254	10.0	1100	28
K9-26912-HHD	26X9-12 RUN FLAT	12	TL	650	25.6	223	8.8	1100	30
K9-261112-HHD	26X11-12 RUN FLAT	12	TL	650	25.6	290	11.4	1200	28
K9-26914-H	26X9-14	6	TL	662	26.1	219	8.6	395	7
K9-261114-H	26X11-14	6	TL	662	26.1	280	11.0	465	7
K9-27914-H	27X9-14	6	TL	686	27.0	219	8.6	410	7
K9-271114-H	27X11-14	6	TL	686	27.0	280	11.0	480	7
K9-27914-HHD	27X9-14 RUNFLAT	12	TL	686	27.0	219	8.6	1250	32
K9-271114-HHD	27X11-14 RUNFLAT	12	TL	686	27.0	280	11.0	1200	28

ATV TIRES

ATV HIDALGO



PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-25812-HG	25X8-12	6	TL	630	24.8	203	8.0	340	7
K9-251012-HG	25X10-12	6	TL	635	25.0	254	10.0	420	7
K9-26912-HG	26X9-12	6	TL	660	26.0	229	9.0	410	7
K9-261112-HG	26X11-12	6	TL	655	25.8	279	11.0	480	7

The CL1 is an all weather and all terrain tire. Features include a slip free shoulder design with large tread blocks that enhance self cleaning properties. Versatile tire is great for users in all conditions.



PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	
				mm	inches	mm	inches		
K9-231110-CL1	23X11-10	6	TL	584	23.0	279	11.0	440	
K9-24910-CL1	24X9-10	6	TL	609	24.0	229	9.0	365	
K9-241110-CL1	24X11-10	6	TL	609	24.0	279	11.0	440	

The CL2 is designed for hard surfaces and trails. Built with a wide profile this tightly grooved design gives the user extended life on pavement, concrete and dirt conditions.



PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-221110-CL2	22X11-10	4	TL	561	22.1	229	10.0	1000	20
K9-23105012-CL2	23X10.50-12	4	TL	246	9.7	203	8.0	1000	20

ATV TIRES

CL3 FRONT



Created to accelerate through soft or hard packed conditions with ease. Designed with superior weight to performance ratios and 6 ply construction ensures lasting durability. The lug design ensures better braking control.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-20109-CL3	20X10-9 REAR	6	TL	505 558	19.9 22.0	229	10.0	300	7
K9-22119-CL3	22X11-9 REAR	6	TL	508	20.0	279	11.0	395	7
K9-20119-CL3	20X11-9 REAR	6	TL	551	21.7	279	11.0	340	7
K9-221010-CL3	22X10-10 REAR	6	TL			254	10.0	355	7

CL3 REAR



The perfect cross country tires with excellent steering and control. The X-knob tread pattern provides top notch handling while the puncture-resistant casing is formulated with the strength necessary to handle rides and races.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-21710-CL3	21X7-10 FRONT	6	TL	523	20.6	178	7.0	235	7
K9-22710-CL3	22X7-10 FRONT	6	TL	544	21.4	178	7.0	255	7
K9-23710-CL3	23X7-10 FRONT	6	TL						

ATV TIRES

KINGSVILLE



Deeper lug than the standard K9 with a fully filled tread to provide long life and great stability.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-241110-KV	24X11-10	6	TL	615	24.2	275	10.8	440	7
K9-251210-KV	25X12-10	6	TL	638	25.1	290	11.4	495	7
K9-24911-KV	24X9-11	6	TL	606	23.9	212	8.3	365	7
K9-241011-KV	24X10-11	6	TL	606	23.9	250	9.8	395	7
K9-24812-KV	24X8-12	6	TL	606	23.9	198	7.8	310	7
K9-25812-KV	25X8-12	6	TL	638	25.1	200	7.9	340	7
K9-251012-KV	25X10-12	6	TL	638	25.1	238	9.4	420	7

DEL RIO



Non-directional tread pattern provides top notch handling and superior traction in an 8-ply radial ATV tire.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-258R12-DR	25X8R12	8	TL	643	25.3	203	8.0	555	18
K9-2510R12-DR	25X10R12	8	TL	643	25.3	243	9.6	680	18
K9-269R12-DR	26X9R12	8	TL	664	26.1	220	8.7	710	20
K9-2611R12-DR	26X11R12	8	TL	664	26.1	283	11.1	890	22
K9-279R14-DR	27X9R14	8	TL	685	27.0	220	8.7	730	20
K9-2711R14-DR	27X11R14	8	TL	685	27.0	275	10.8	930	22

TEXLINE



Fast non-directional tread, super tough 10-ply build, and modern design make this premium tire an easy choice.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-2810R14-TX	28X10R14	10	TL	711	28.0	248	9.8	900	22
K9-3010R14-TX	30X10R14	10	TL	762	30.0	248	9.8	1000	22
K9-2810R15-TX	28X10R15	10	TL	711	28.0	245	9.6	900	22
K9-3010R15-TX	30X10R15	10	TL	762	30.0	245	9.6	1000	22

K9



K9 LAWN & GARDEN TIRES

LAWN AND GARDEN



Classic soft turf design that minimizes turf damage while providing stability and comfort.



PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-4103504-TURF	4.10/3.50-4	4	TL	269	10.6	99	3.9	230	24
K9-114005-TURF	11X4.00-5	4	TL	270	10.6	101	4.0	325	46
K9-135006-TURF	13X5.00-6	4	TL	315	12.4	128	5.0	440	40
K9-136506-TURF	13X6.50-6	4	TL	320	12.6	145	5.7	480	28
K9-156006-TURF	15X6.00-6	4	TL	380	15.0	160	6.3	570	30
K9-166508-TURF	16X6.50-8	4	TL	415	16.3	167	6.6	615	28
K9-188508-TURF	18X8.50-8	4	TL	450	17.7	210	8.3	815	22
K9-189508-TURF	18X9.50-8	4	TL	460	18.1	235	9.3	1040	24
K9-208008-TURF	20X8.00-8	4	TL	500	19.7	239	9.4	965	22
K9-2010008-TURF	20X10.00-8	4	TL	505	19.9	253	10.0	1200	22



Provides better traction and lateral stability for larger machines while minimizing turf damage.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-20100010-TURFS	20X10.00-10	4	TL	508	20.0	243	9.6	1160	22
K9-2385012-TURFS	23X8.50-12	4	TL	588	23.1	215	8.5	1120	22
K9-23105012-TURFS	23X10.50-12	4	TL	590	23.2	250	9.8	1340	20
K9-24120012-TURFS	24X12.00-12	6	TL	610	24.0	280	11.0	2260	32
K9-26120012-TURFS	26X12.00-12	6	TL	655	25.8	310	12.2	2450	35

LAWN AND GARDEN



For maximum mower traction and safety in hilly terrain and when pulling trailers.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-135006-R1	13X5.00-6	2	TL	330	13.0	118	4.6	295	20
K9-156006-R1	15X6.00-6	6	TL	385	15.2	155	6.1	710	40
K9-4008-R1	4.00-8	4	TL	425	16.7	114	4.5	375	23
K9-166508-R1	16X6.50-8	6	TL	418	16.5	162	6.4	785	42
K9-189508-R1	18X9.50-8	4	TL	455	17.9	222	8.7	1040	24
K9-2010008-R1	20X10.00-8	4	TL	515	20.3	242	9.5	1190	22
K9-23105012-R1	23X10.50-12	6	TL	590	23.2	260	10.2	1760	32
K9-24120012-R1	24X12.00-12	6	TL	610	24.0	304	12.0	2270	32
K9-26120012-R1	26X12.00-12	8	TL	665	26.2	300	11.8	3020	50



Wide rib design provides “hit and skip” capability to stabilize zero turn mowers in rough terrain.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-114005-RIB	11X4.00-5	4	TL	270	10.6	100	3.9	325	46
K9-135006-RIB	13X5.00-6	4	TL	322	12.7	120	4.7	440	40
K9-136506-RIB	13X6.50-6	4	TL	333	13.1	160	6.3	460	28
K9-156006-RIB	15X6.00-6	4	TL	380	15.0	160	6.3	570	30
K9-166508-RIB	16X6.50-8	4	TL	410	16.1	165	6.5	620	28
K9-188508-RIB	18X8.50-8	4	TL	455	17.9	210	8.3	815	22



Classic stud design reduces sideway skids and provides better slick surface traction.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-4103504-STUD	4.10/3.50-4	4	TL	275	10.8	99	3.9	350	50
K9-4103506-STUD	4.10/3.50-6	4	TL	325	12.8	99	3.9	445	50
K9-4808-STUD	4.80-8	4	TL	420	16.5	120	4.7	670	42

LAWN AND GARDEN



Low rolling resistance, long tread life, and high load capacity in a classic tread design.


PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-4103504-SAW	4.10/3.50-4	4	TL	275	10.8	99	3.9	350	50
K9-4103505-SAW	4.10/3.50-5	4	TL	300	11.8	99	3.9	380	50
K9-4103506-SAW	4.10/3.50-6	4	TL	325	12.8	99	3.9	445	50



Wide footprint and non-directional tread design provide unmatched stability and durability on turf and pavement alike.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-188508-GOLF	18X8.50-8	4	TL	457	18.0	210	8.3	815	24
K9-18850R8-GOLF	18X8.50R8	4	TL	457	18.0	210	8.3	615	22

K9 SMOOTH



Deeper lug than the standard K9 with a fully filled tread to provide long life and great stability.

PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-93504-SM	9X3.50-4	4	TL	232	9.1	85	3.4	352	50
K9-114005-SM	11X4.00-5	4	TL	268	10.6	100	3.9	325	46
K9-116005-SM	11X6.00-5	4	TL	282	11.1	128	5.0		42
K9-135006-SM	13X5.00-6	4	TL	232	9.1	123	4.8	440	40
K9-136506-SM	13X6.50-6	4	TL	330	13.0	161	6.3	480	28

K9



K9 TRAILER TIRES

K9 TRAILER TIRES

TRAILER

Squared shoulder provides better sidewall protection while sawtooth tread design increases contact patch surface.



PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-4808	4.80-8	6	TL	418	16.5	120	4.7	745	90
K9-5708	5.70-8	6	TL	460	18.1	155	6.1	910	75
K9-48012	4.80-12	6	TL	520	20.5	118	4.6	990	90
K9-53012	5.30-12	6	TL	545	21.5	139	5.5	1050	80
K9-8145	8-14.5	14	TL	706	27.8	203	8.0	3036	110

Wide, non-directional tread reduces trailer noise and provides better control when steering heavy loads.



PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-1858508	18.5X8.50-8	6	TL	480	18.9	213	8.4	940	50
K9-2058010	20.5X8.0-10	10	TL	520	20.5	205	8.1	1535	90

Classic radial trailer rib paired with wrap around shoulder tread design provides new levels of stability, durability, and comfort in a radial trailer tire.



PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-17580R13	ST175/80R13	8	TL	606	23.9	178	7.0	1610	68
K9-20575R14	ST205/75R14	6	TL	660	26.0	205	8.1	1760	50
K9-20575R15	ST205/75R15	8	TL	682	26.9	208	8.2	2150	65
K9-22575R15	ST225/75R15	10	TL	714	28.1	225	8.9	2830	80
K9-23580R16	ST235/80R16	10	TL	777	30.6	235	9.3	3520	80
K9-23585R16	ST235/85R16	14	TL	806	31.7	236	9.3	4000	95

Incredibly durable all-steel carcass provides stability and endurance for high speed long haul operations.



PART #	SIZE	PLY RATING	TT/TL	OVERALL DIAMETER		SECTION WIDTH		LOAD LIMIT (LBS)	PSI
				mm	inches	mm	inches		
K9-23580R16-AS	ST235/80R16 ALL STEEL	14	TL	790	31.1	235	9.3	3415	80
K9-23585R16-As	ST235/85R16 ALL STEEL	14	TL	805	31.7	236	9.3	3960	95
K9-22575R15-AS	ST225/75R15 ALL STEEL	12	TL	719	28.3	223	8.8	2835	95

BORN IN THE BOGGY BAYOUS OF THE PINEYWOODS,
TESTED ON THE CRAGGY CLIFFS OF BIG BEND,
REFINED ON THE FAST FLAT TRACKS OF THE PANHANDLE PLAINS:

TIRES AS TOUGH AS TEXAS

KINGSVILLE
ALL BIAS 6 PLY RATED



SIZE
24x11-10
25x12-10
24x9-11
24x10-11
24x8-12
25x8-12
25x10-12

DEL RIO
ALL RADIAL 8 PLY RATED



SIZE
25x8R12
25x10R12
26x9R12
26x11R12
27x9R14
27x11R14

TEXLINE
ALL RADIAL 10 PLY RATED



SIZE
28x10R14
30x10R14
28x10R15
30x10R15



K9 ALL STEEL TRAILER

- Mid/Long Haul Trailer Service
- All Steel Construction
- Specialized tread compound for optimal wear at highway speeeds
- Tread pattern promotes water drainage and increases slip resistance

SIZE
225/75R15
235/80R16
235/85R16

PUREBRED TREADS


K9
PUREBRED TREADS